


networking cables

CPC-XXXX-xxF

Copper Patch Cords

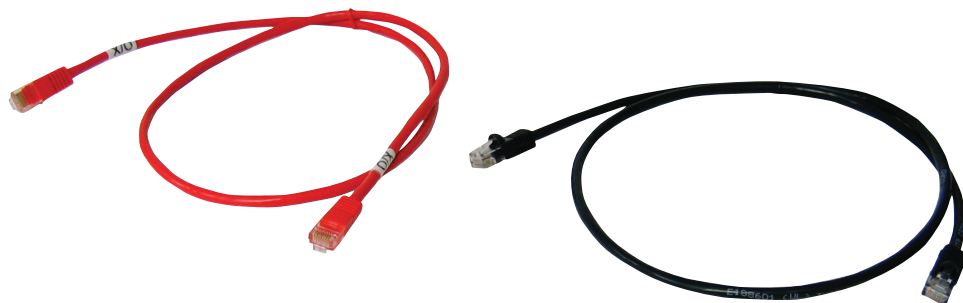

Ordering Information

CPC- - F

Cable Type

Length

Cable Type	
5EB	CAT 5e Straight-through
X5ER	CAT 5e Crossover
6B	CAT 6 Straight-through
X6R	CAT 6 Crossover

Length	
xx	Length in ft.

03 = 3 ft. [0.91 m]

Available lengths:

1, 2, 3, 5, 7 and 10 ft.

***Note:**

All cables include molded boot; same color as the cable.

Standard color for straight-through cables is black.

Standard color for crossover cables is red.

Custom colors and lengths may be available upon request.

Features

- ▶ Snagless, molded boots provide strain relief and prevent kinking as well as snagless cable mining.
- ▶ All CAT5e cables tested to 350 MHz; CAT6 cables tested to 250 MHz. construction with RJ-45 connectors.
- ▶ Available in both straight or crossover pinning.
- ▶ Lifetime Warranty

Specifications

Standards	TIA/EIA-568-A, B
Cable Specs	CAT 5e
Cable Type	4-pair UTP
Conductor Gauge	24 AWG, stranded
Jacket	PVC, 80C, OD=5.3 mm
Frequency	up to 350 MHz
Impedance	100 +/- 15 ohms
Attenuation (max.)	24 dB/100 m @ 100 MHz; 49 dB/100 m @ 350 MHz
Cable Specs	CAT 6
Cable Type	4-pair UTP
Conductor Gauge	24 AWG, stranded
Jacket	PVC, 80C, OD=6.2 mm
Frequency	up to 250 MHz
Impedance	100 +/- 15 ohms @ 100 MHz
Attenuation (max.)	24 dB/100 m @ 100 MHz; 39 dB/100 m @ 250 MHz
Length Tolerance	Length specified +/- 2%
Environment	
Operating Temperature:	-40°C to +85°C
Humidity:	5% – 95% non-condensing
Warranty	Lifetime